








COMBIFLO MS™

Composite Melt-blown Depth Filters



INDUSTRIES & APPLICATIONS

-  **Food & Beverage** : Bottle water, Beers, Wines, Syrups, Soft drinks
-  **Electronics** : Process chemicals, Plating solutions, Wash solutions
-  **Chemicals** : Acids, Bases, Solvents
-  **Cosmetics** : Alcohol, Creams, Oils
-  **Coats** : Coating solutions, Paints, Inks
-  **Water treatment** : Process water clarification, Membrane pre-filtration
-  **Petrochemicals** : Oils, Resins

COMBIFLO MS™ are composite melt-blown depth filter cartridges designed for finer pre-filtration in water purification, chemical, food and beverage applications.

COMBIFLO MS™ utilizes polypropylene melt-blown micro fibers as a base filter medium and has integral depth filter media to provide finer and consistent filtration efficiency. The combination of melt-blown microfiber and depth filter media provides ideal graded filtration through the depth construction of the media, resulting in increased dirt holding capacity and finer filtration efficiency.

FEATURES & BENEFITS

- The composite unique construction provides high dirt holding capacity and higher particle removal efficiency
- The uniform fiber structure provides reliable reproducibility
- High dirt holding capacity reduces processing time and maintenance cost
- Reliable and cost-effective to reduce expenses
- All polypropylene construction provides excellent chemical compatibility
- No binders are present to interrupt product quality
- Available in a wide range of materials, end styles and micron ratings

TECHNICAL DATA

Nominal Dimensions

· Length	250, 500, 750, 1000 mm 10, 20, 30, 40 inch
· Inner Diameter	28, 30 mm
· Outer Diameter	62 mm

Materials of Construction

· Filtration Media	Polypropylene
· Integral Filter Media	Polypropylene
· Inner Core	Polypropylene Glass filled Polypropylene
· End Caps	Polypropylene Glass filled Polypropylene
· O-rings / Gaskets	Silicone EPDM Viton TEV Foamed Polyethylene

Max. Operating Temperature

80°C (176°F)

Max. Operating Forward Differential Pressure

5 bard (72.5 psid) at 20 °C
4 bard (58.0 psid) at 40 °C
3 bard (43.5 psid) at 60 °C
1 bard (14.5 psid) at 80 °C

Recommended Change Out Differential Pressure


2 bard (29.0 psid)

Micron Ratings

1, 2, 3, 5, 10 µm
99% (β-Ratio 100) in accordance with modified ASTM F-795-88
(Single pass, constant flow of 10LPM/10" cartridge, ISO standard dust A3 in water)

TYPICAL CLEAN WATER FLOW

CARTRIDGE

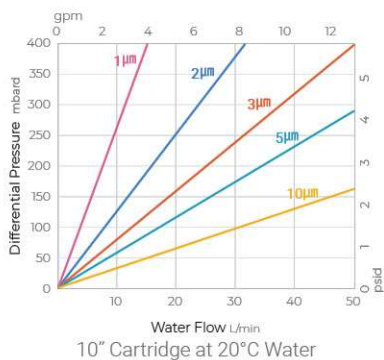

ORDERING INFORMATION

①	②	③	S	P	④	⑤	⑥
CMS	001	C1			S	1	1
	MICRON RATING	END STYLE			SEALS	ID/OD	LENGTH
	001 : 1µm	C1 : DOE			W : Without Seal	1 : Ø28/Ø62	1 : 250mm
	002 : 2µm	C2 : 226Lock/FLAT			P : Foamed PE	2 : Ø30/Ø62	2 : 500mm
	003 : 3µm	C3 : 222/FLAT			S : Silicone		3 : 750mm
	005 : 5µm	C7 : 226Lock/FIN			E : EPDM		4 : 1,000mm
	010 : 10µm	C8 : 222/FIN			V : Viton		A : 254mm
					F : TEV		B : 508mm
							C : 762mm
							D : 1,016mm